


Rinnai Infinity 2010 Range Overview

Revised 23.3.10A

REU	Rinnai Hot water	G	General model	C	Commercial model	(50)	50°C outlet water preset
V	‘V’ Series	D	Flangeless model	B	Builders Model	(60)	60°C outlet water preset
M	Status monitor	FFU	Internal model	S	Solar Model	(65)	65°C outlet water preset
W	External Model	K	Anti-frost fitted	P	Inbuilt Smart Start Pump		
A	Australian Spec	R	Revised Model	KM	Condensing		

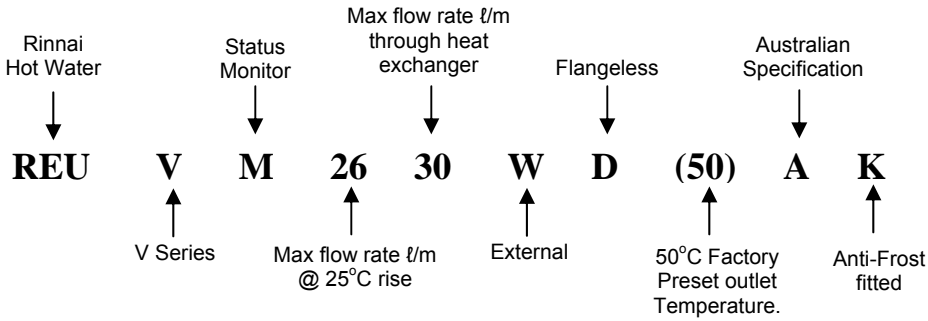

NOTE: (*50) 50°C Factory pre-set temperature can not be altered by dip switches

2009 Model	Pet Name	2010 Model	Pre Set temp	Group	Gas Type Available	Color	Recess Box F=Spacer Frame	Pipe cover	Nature of change	Reason for change
REU VR 1620WG AK	Infinity 16	No Change	55	Core	NG & LPG	Euro White	Smartbox SmartboxF	PC11	Reduction in the models of factory pre-set 50°C units on offer.	To Due to change in legislation, only factory pre-set 50° C units may be installed. *Please refer to note over page Factory pre-set 50°C units now have capacity to adjust hot water outlet temperature to obtain a true 50°C at the hot water tap closest to the Rinnai Infinity Rationalize stock levels and ease confusion when ordering.
REU VR 1620WG(50)AK		50°C Variant deleted. Use 55°C model & Tempering valve or choose V1200								
REU VR 1620 WB AK	V1200	55°C Variant deleted Use REU VR 1620WG (50)-AK	(*50)	Builders	NG & LPG	Dune		PC11D		
REU VR 1620 WB(50)AK		No Change								
REU VR1620WS(60)AK	S20	No Change	60	Solar	NG & LPG	Dune		PC11D		
REUVR2024WGAK	Infinity 20	No Change	55	Core	NG & LPG	Euro White		PC11		
REUVR2024WG(50)AK		No Change	(*50)							
REU VR 2426 WB AK	V1500	55°C Variant deleted Use REU VR 2626 WG -AK	(*50)	Builders	NG & LPG	Dune		PC11D	Only factory pre-set 50°C model available	Rationalization of product range.
REU VR 2426 WB (50)AK		No Change								
REU VR 2426 WS (60) AK	S26	No Change	60	Solar	NG & LPG	Dune		PC11D	No Change	
REU VR 2626 WG-AK	Infinity 26	No Change	55	Core	NG & LPG	Euro White		PC11		
REU VR 2626 WG(50)AK		No change	(*50)	Core						
REU VRM 2630 WD AK	Infinity 26 Plus	No Change	55	Core	NG only	Star Metallic		PCD01	Reduction in the models of factory pre-set 50°C units on offer. Due to change in legislation, only factory pre-set units may be installed. Factory pre-set units now have capacity to adjust hot water outlet temperature to a true 50°C at the hot water tap.	To rationalize stock levels and ease confusion when ordering.
REU VRM 2630 WD (50) AK		50°C Variant deleted. Use 55°C model & Tempering valve or choose REU VR 2626 WG(50) AK								
REU VR 2632 FFUG-A	Infinity 26i	No Change	55	Core	NG & LPG	Euro White	None Available	None Available	Reduction in the models of factory pre-set 50°C units on offer. Standard 55°C pre set temperature available. Use Tempering Valve for 50°C applications	To rationalize stock levels and ease confusion when ordering.
REU VR 2632 FFUG (50) A		50°C Variant deleted. Use 55°C model & Tempering Valve.								
REU VR 3237 WG AK	Infinity 32	No Change	55	Core	NG & LPG	Euro White	RBOX02 RBOX02F	PCV02	Reduction in the models of factory pre-set 50°C units on offer. Standard 55°C pre set temperature available. Use Tempering Valve for 50°C applications	Rationalization of product range.
REU VR 3237 WG (50) AK		50°C Variant deleted. Use 55°C model & Tempering Valve.								
REU VRM 2632 FFU (65) C	HD200i	No Change Factory locked pre-set 50°C at the Infinity outlet available for commercial manifold packs. Special Factory build only.	65	Commercial	NG & LPG	Titanium	None Available	None Available	Not Suitable for sideways Flue Diverter. Factory pre-set 50°C at the Infinity outlet available for commercial manifold pack applications if required. Special Factory build only. Order as required. No longer able to adjust from 65° C to 50° C on site.	To Due to change in legislation, only factory pre-set 50° C units may be installed.
REU VRM 2632 WC (65)AK	HD 200e									
REU VRM 3237 WC (65) AK	HD 250e						RBOX02 RBOX02F	PCV02 but will be Euro White color		
REU K2430WG-AK REU K2430WG-(50) AK	Enviro Smart	Deleted					None Available	None Available		Superseded by REU KM 2635 WD AK & REU-KM3237WD-AK
REU KM 2635 WD AK	Enviro 26	New Appliance for 2010	55	Enviro Range	NG & LPG	Star Metallic	RBOX05 RBOX02F	PCD07	Next Generation of Rinnai Infinity. Condensing heat exchanger. 7 star efficiency rating Use RBOX05	Rinnai leads the way in saving the environment.
REU-KM3237WD-AK	Enviro 32	New Appliance for 2010	55	Enviro Range	NG & LPG	Star Metallic	RBOX05 RBOX02F	PCD07	Next Generation of Rinnai Infinity. Condensing heat exchanger. 6.8 star efficiency rating Use RBOX05	
REU-VR2626WGP-AK	Infinity 26 with inbuilt Smart Start	New Appliance for 2010	50	Core	NG & LPG	Euro White	RBOX02 RBOX02F	PCV02	CUG1 (Smart Start pump) now housed in case of appliance. Appliance case same as REU VR 3237. Use RBOX 02	Faster and neater installation.







*50° Water temperature legislation; NEW HOMES & RENOVATIONS

New Homes and major renovations, hot water supplied to personnel hygiene areas (Bath, Basin , Shower etc) must not exceed 50°C. Due to changes in Plumbing Regulations and AS3498, this regulation can be met by either installing a continuous flow hot water factory pre-set to deliver water no hotter than 50° C or fit an approved tempering valve / thermostatic mixing valve.

If choosing a factory pre-set 50°C appliance, the AS3498 allows for the adjustment of the factory pre-set 50°C appliance to be adjusted by up to maximum of 4°C to compensate for temperature loss along the hot water pipe to achieve a true 50°C at the nearest hot water tap. Plumbing Regulations will no longer allowed to simply altering a dip switch on a standard unit to lower the temperature to 50°C (ie: switching from standard 55°C appliance to deliver water at 50°C

EXISTING HOMES

On an existing home, simply changing an existing hot water that had previously been set to a temperature higher than 50°C, you are not normally required to fit either a factory pre-set 50°C appliance or fit a tempering valve to an appliance set to a temperature higher than 50°C.

Feature	Benefit	Vital Statistics	Order Code	Photo
K26 Kit	Ease of ordering	Standard 26 litre Infinity + 2 x MC91 Standard Controllers Available also as a pre-set 50°C option Nat Gas Only	K26	
KS26P	Ease of ordering	26 Plus + 2 x MC 91 Standard Controllers No longer available as a pre-set 50°C option Nat Gas Only	KS26P	
K26W	Ease of ordering	Standard 26 litre Infinity + 1 x 503 Transceiver + 1 x 503 series Wireless Controller No longer available as a pre-set 50°C option Nat Gas Only	K26W	
Plastic Recess Box	Light weight and durable. Easy to install Full cover front standard in a 'Dune' color Can be painted to match any color scheme Hides all pipes, valves and power point	Cut out dimensions: 400mm W x 1030mm H x 160mm D min. Protrusion from wall 55mm Suits all external models except Infinity 32 & HD200e, Enviro 26 /32 & 26 Smart Start Optional wall frame available to suit weatherboard wall	Smartbox SmartboxF	<div>Smart Box</div> <div>RBOX02</div> <div>RBOX05</div> 
Traditional galvanized metal recess box	Durable galvanized metal recess box. Frame available to allow semi-recessed installation. (Use ROX02F)	Suits Infinity 32, 26 Litre Smart Start & HD250e New HD200e (2632WC)	RBOX02 RBOX02F	
New RBOX05	Full cover door Can be painted to match any color scheme Can install power point within recess box	Suits Enviro 26 & Enviro 32 only	RBOX05 RBOX02F	
Pipe Cover	Creates a smooth finished appearance to the installation by conveniently covering pipe work & valves etc Choose the cover to match the size, color & style of your Infinity	PC11 suits Infinity's 16 ~ 26 Litre PC11D suits V1200, V1500 PCD01 Suits Infinity 26 Plus PCV02 Suits Infinity 32 PCD07 Suits Enviro 26 & Enviro 32	PC11 PC11D PCD01 PCD07	<div>PC11</div> <div>P11CD0D</div> <div>PCD01</div> <div>PCD07</div> 
REU-VR2626WGP-AK	Smart Start Pump now incorporated into appliance case.	Available in the 26 litre external Infinity only. Must use water controllers Not suitable for solar booster application For all other model Infinity's, use original 'SMARTSTART'	INF26SS	
REU KM 2635 WD AK REU-KM3237WD-AK	Replacement for Enviro-smart.	Additional Latent Heat Exchanger to further improve efficiency. USE RBOX05	ENV26 ENV32	